


► **Bimetallic Cable Lug (CAL/DTL2)**

Used for connecting Aluminium cables to Copper bus bars and/or cables.

TYPE	Q	D	d	L	L1
DTL2-50	13	20	9.2	90	43
DTL2-70	13	20	11.2	90	43
DTL2-95	13	20	12.7	90	43
DTL2-120	13	25	13.9	116	60
DTL2-150	13	25	15.7	116	60
DTL2-185	13	32	18.5	125	60
DTL2-240	17	32	21.5	125	60
DTL2-300	17	34	23.5	130	62

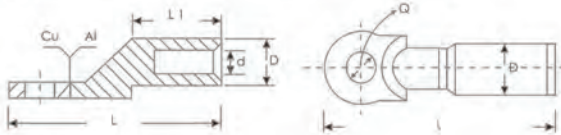


► **Full Bimetallic Cable Lug :**

Full bimetallic cable lug manufactured from aluminum tube 99.5%. The complete cable lug surface is Copper+Tin coated. This product may be used for connecting Aluminum and/or Copper cables to Aluminum and/or Copper bus bars and/or cables.

Full bimetallic Cable Lug (SHM type) Table :

Cross Section (mm ²)	d2 (Ø)	d1(mm)	d3(mm)	d4 (mm)
25	8	6.8	12	20
35	12	8	14	20
50	12	9.8	16	28
70	12	11.2	18.5	28
95	12	13.2	22	35
120	12	14.7	23	35
150	12	16.3	25	35
185	16	18.3	28.5	40
240	16	21	32	40
300	16	23.3	34	50
400	20	26	38.5	70
500	20	29	44	70

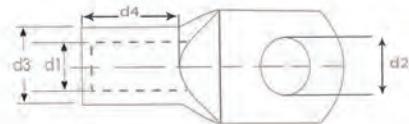

Full bimetallic Cable Lug (DTL type) Table :

TYPE	Q	D	d
25	13	16	7
35	13	16	8
50	13	20	10
70	13	20	11
95	13	20	13.5
120	13	25	15
150	13	25	17
185	13	32	19
240	17	32	21.5
300	17	34	24
400	21	42	27
500	21	42	30

