


WRAP AROUND REPAIR SLEEVE (WAC)

Wrap Around Repair Sleeves are ideally suited for repairing any kind of outer sheath opening or outer sheath damage. High mechanical strength, impact resistance, excellent electrical characteristics for low voltage applications, Halogen-free material, non-corrosive and non-toxic smoke in the event fire are key features of Wrap Around Repair Sleeves.

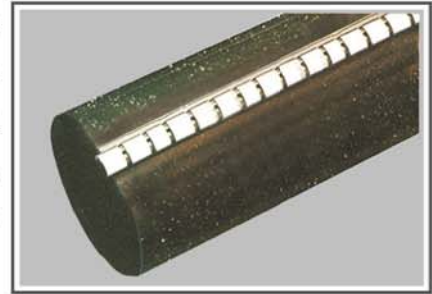

BLACK

FEATURES	Results	Standard	Dimensions mm ²	D min mm ²	d max mm ²	Tmin mm	Length mm ²
THERMAL	-	-					
Continuous Temperature Limits	-40°C+125°C	-	36/10	36	10	1.5	1000-1500
Thermal Shock (225°C)	NO damage	ASTM D 2671	50/15	50	15	1.5	1000-1500
PHYSICAL	-	-	55/13	55	13	1.5	1000-1500
Tensile Strength	≥ 17 MPa	ASTM D 638	75/22	75	22	1.5	1000-1500
Elongation	≥ 400%	ASTM D 638	80/20	80	20	1.5	1000-1500
Water Absorption	≤ 0.15%	ISO 62	105/30	105	30	1.5	1000-1500
ELECTRICAL	-	-	108/27	108	27	1.5	1000-1500
Dielectric Strength	≥ 12kV/mm	ASTM D 149	136/30	136	30	1.5	1000-1500
Volume Resistivity	1*10 ¹⁴ Ωcm	ASTM D 257	146/38	146	38	1.5	1000-1500
CHEMICAL	-	-	180/50	180	50	1.5	1000-1500
Fungi Resistance	NO growth	ASTM D 638, ASTM G 21	188/55	188	55	1.5	1000-1500