


Heat Shrinkable LV Thin Wall Tubing

Heat Shrinkable LV Thin wall tubing is made of flame retardant, Anti-UV cross linked Polyolefins and may be supplied in different colors and sizes.

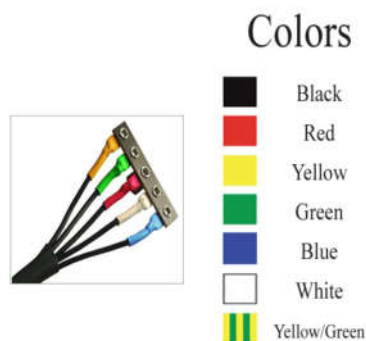

Range / Dimensions of the Product

Code & Size	D min (mm)	d max (mm)	t min (mm)	Spool Length (M/spool)
TWU 3/1.5	3	1.5	0.50	200
TWU 5/2.5	5	2.5	0.8	200
TWU 6/3	6	3	0.65	200
TWU 8/4	8	4	0.60	200
TWU 10/5	10	5	0.65	200
TWU 12/6	12	6	0.60	200
TWU 14/7	14	7	0.65	100
TWU 16/8	16	8	0.65	100
TWU 18/9	18	9	0.70	100
TWU 20/10	20	10	0.70	50
TWU 22/11	22	11	0.70	50
TWU25/12.5	25	12.5	0.85	50
TWU 30/15	30	15	1	50
TWU 35/17.5	35	17.5	1	50
TWU 38/19	38	19	0.90	50
TWU 50/25	50	25	0.95	25
TWU 76/38	76	38	1.35	25
TWU 100/50	100	50	1.75	25